


NORFAB SERIES 400 TAPE

Norfab Series 400 quality tapes are carefully woven and sized using Para-Aramid fibers on fiberglass core yarn. The tapes are then specially inspected, rolled and wrapped to prevent contamination. Applications include lagging of all types, pipe insulation wrap, electrical insulation, thermal insulation and gasketing.

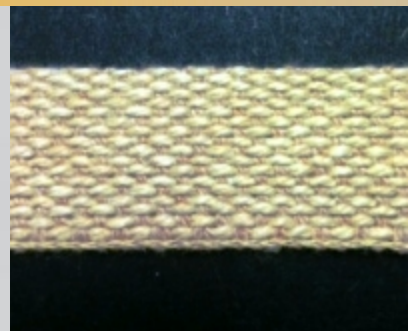

About NOR*FAB Corporation

NOR*FAB manufactures textile products using flame resistant synthetic fibers suited for use at high temperatures and for personal protection. These items include broad woven roll goods and narrow products in the form of woven and knitted tapes, sleeving, rope, and gasketing. NOR*FAB uses para-aramid, meta-aramid, melamine, phenolic, oxidized PAN, flame resistant rayon, polybenzimidazole, and other technical fibers blended into unique yarns which provide high levels of heat protection and insulation.

NOR*FAB produces many of these yarns on the DREF Spinning System for use in the weaving, knitting, gasket, and wire & cable industries. NOR*FAB possesses the largest collection of DREF III spinning frames of any yarn manufacturer in the world.

Among its offerings, NOR*FAB boasts fabric lines for the following end uses:

Firefighting

OMNI Vantage™, OMNI Elite®, OMNI 45™, and OMNI Quilt™

Electric Arc Protection

NF Arc™, ArcWeld®

Welding Protection

ArcWeld®

Cut Protection

CutPro®

Over 30 Years

Proud American Manufacturers of Flame Resistant Textiles



NORFAB Series 400 Tape Data Sheet

Style	N22P400
	1/16" (1.6mm)
Width, inches (cm) / Code	Lbs / 100ft
1/2" (1.3 cm) / 4	0.54 (0.23 Kg)
3" (7.6 cm) / 16	3.33 (1.51 Kg)
4" (10.2 cm) / 20	4.45 (2.02 Kg)
3/4" (1.9 cm) / 6	0.85 (0.36 Kg)
1" (2.5 cm) / 8	1.11 (0.50 Kg)
1 1/2" (3.8 cm) / 10	1.66 (0.75 Kg)
2" (5.1 cm) / 12	2.22 (1.01 Kg)
2 1/2" (6.3 cm) / 14	2.78 (1.26 Kg)
5" (12.7 cm) / 21	5.55 (2.52 Kg)
6" (15.2 cm) / 22	6.66 (3.03 Kg)
7" (17.8 cm) / 46	7.77 (3.53 Kg)
8" (20.3 cm) / 23	8.88 (4.04 Kg)
9" (22.9 cm) / 72	9.99 (4.54 Kg)
10" (25.4 cm) / 80	11.11 (5.05 Kg)
11" (27.9 cm) / 88	12.21 (5.55 Kg)
12" (30.5 cm) / 96	13.32 (6.05 Kg)

To order tape, select thickness and width you require. Identify the code number for proper tape width. This is suffix of the order part number. Example: you wish to order 1/32" thick tape at a width of 2". The 1/32" thickness is tape N11P400. The width code for 2" wide tape is 12. Therefore, specify N11P400-12 tape.

- Roll lengths 100 feet unless otherwise specified. (See**note above).
- Pressure Sensitive Adhesive (PSA) available up to 3" tape widths.
- Items marked above with one asterisk (*) must be minimum 5 roll order.
- Other tape widths available in minimum quantities of 20 rolls per order.
- For less than 20 rolls for special sizes a \$300.00 set-up charge applies.
- All tapes may be Vertex (vermiculite coated) for an additional coating charge.



1310 Stanbridge Street,

Box 830, Norristown, PA 19404-0830 U.S.A.

Tel: 610-275-7270 • 800-441-9680 • Fax: 610-277-6106

Email: sales@norfab.com • www.norfab.com