




Amatex Thermoglass™ Laconia Narrow Products


www.amatex.com



Woven
Tadpole Gasket



Sleeving



Industrial



Filtration



Belting Fabrics



Gasketing




Silica Cloth



Fiberglass Tape



Fiberglass Rope

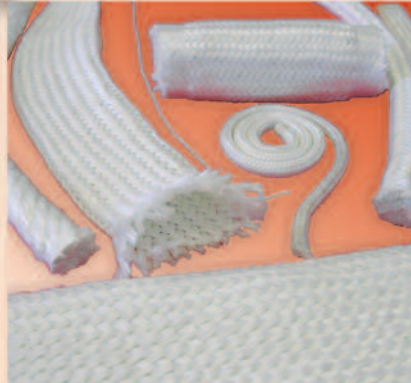

Insulation Cloth




Marine

Amatex Thermoglass™

Manufacturers of industrial heat resistant textiles - featuring Thermoglass™ fiberglass products, silica fabrics, and proprietary treated and coated products.




Thermoglass™ Premium Tape - Heat Treated

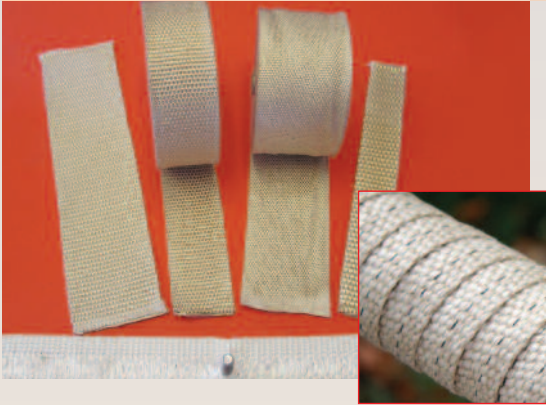

- Heat treated, prevents the off gassing of fiberglass sizing, temperature rating to 1000° F (538° C).
- Used for pipe wrapping (lagging) and electrical insulation
- Tape thicknesses: - 1/32", 1/16", 1/8", 1/4".
- Tape widths - From 1/2" through 12", fractional sizes between 1/2" & 2 1/2" widths.
- Standard roll lengths: - 100 feet (1,200"). May be customized.
- Alternate finishes: - Black graphite and pressure sensitive adhesive.

Thermoglass™ Industrial Tape - Loom Stage White Finish

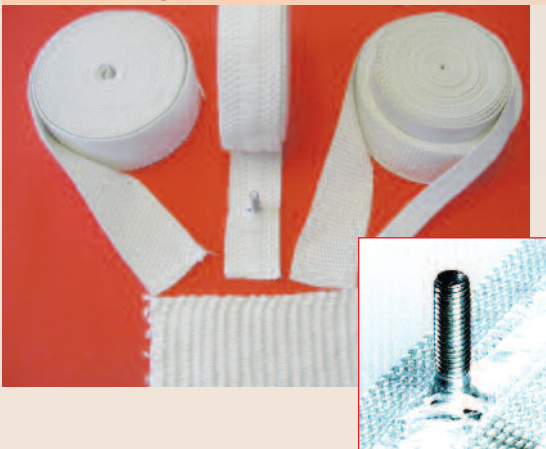

- Inexpensive tape in natural white (loom stage as it comes from production). Temperature rating to 1000° F (538° C).
- Also used for pipe wrap (lagging) and electrical insulation, edging for strength sewn on blankets for grommeting.
- Tape thicknesses: - 1/32", 1/16", 1/8", 1/4".
- Tape widths - From 1/2" through 12", fractional sizes between 1/2" & 2 1/2" widths.
- Standard roll lengths - 100 feet (1,200"). May be customized.
- Available variations: - Drop warp for bolt holes, black graphite finish, pressure sensitive adhesive (PSA).


Thermoglass™ Vertex Coated Tapes



- Vertex coating raises temperature rating to 2000° F (1093° C) of this product. For high temperature insulation.
- Tape thicknesses: - 1/32", 1/16", 1/8", 1/4".
- Tape widths - From 1" through 8".
- Standard roll lengths - 100 feet (1,200"). May be customized.
- Color variations: - Natural (tan), black, blue, red, yellow, orange.


Amatex Thermoglass™ Product Lines *continued*

Thermoglass™ Sleeving Products

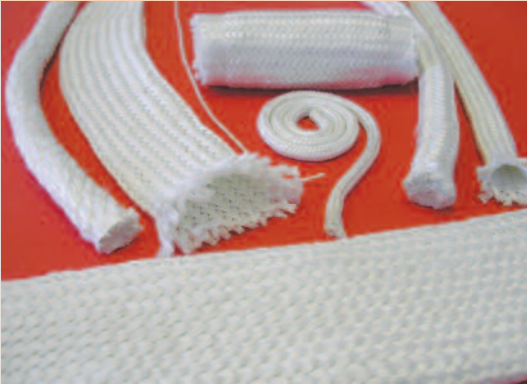

- Temperature rating to 1000° F (538° C) and Vertex coated sleeving increases temperature rating to 2000° F or (1093° C).
- 1/32" wall thicknesses for inside diameters 1/8" through 2".
- 1/16" wall thicknesses for inside diameters 1/8" through 4 1/2".
- 1/8" wall thicknesses for inside diameters 1/8" through 4".
- 1/4" wall thicknesses for inside diameters 1/8" through 3 1/2".
- Tape widths - From 1/2" through 12", fractional sizes between 1/2" & 2 1/2" widths.
- Standard lengths: - Put up on 25 pound spools, or special lengths.
- Alternate finishes: - White (loom stage) or Vertex coated (tan).

Thermoglass™ Braided Ropes

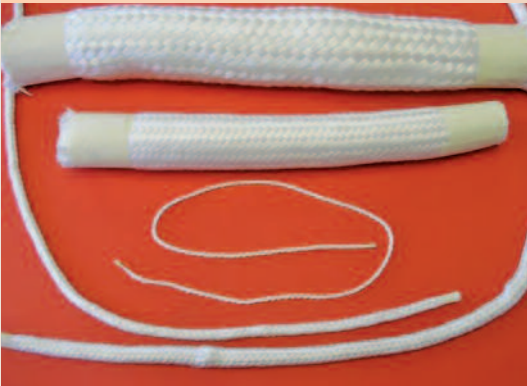

- Applications for oven and door seals, packing channels, boilers. Temperature rating to 1000° F (538° C). Vertex coated ropes increases temperature rating to 2000° F or (1093° C).
- Standard rope diameters 1/8" through 3".
- Packaging - Put ups on 25 pound spools or as requested.

Thermoglass™ Twisted Ropes



- Oven & door seals, packing channels, boiler applications, furnaces.
- Temperature rating to 1000° F (538° C).
- Rope outside diameters - 1/8" through 2".
- Packaging - Put ups on 25 pound spools or as requested.




Amatex Corporation

45 Primrose Drive
Laconia, NH 03246 USA
Phone 866-524-2552
Fax 866-924-3526
Website: www.amatex.com
Email: sales@amatex.com



Rope

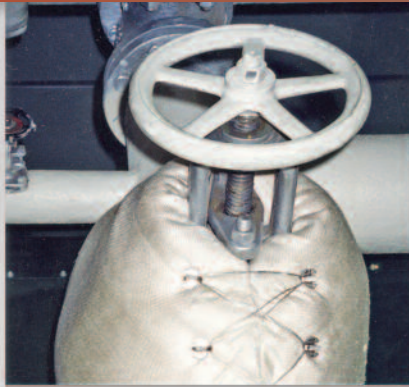

Marine




Gasketing



Insulation Cloth



Fiberglass Tape



Industrial



Fiberglass Rope



Belting Fabrics



Distributed By:



Filtration



Sleeving



Woven Tadpole Gasket



Amatex Corporation

45 Primrose Drive
Laconia, NH 03246 USA
Phone 866-524-2552
Fax 866-924-3526
Website: www.amatex.com
Email: sales@amatex.com



Silica Cloth